



**Advanced Heating
& Hot Water Systems**

Phoenix[®] LIGHT DUTY

Highly Efficient Stainless Steel
Gas-Fired Water Heater



76,000 Btuh

**50, 60 & 80 Nominal
Gallon Tanks**

Up to 97% Thermal Efficiency

Up to .90 UEF

Modulating Combustion System

316L Stainless Steel Tank

Multiple Venting Options

- 2" PVC, CPVC or ULC S636 pipe
- Combined vent length of 150 ft




A BRAND OF  **ARISTON**
THERMO USA




Phoenix LD

A CLOSER LOOK

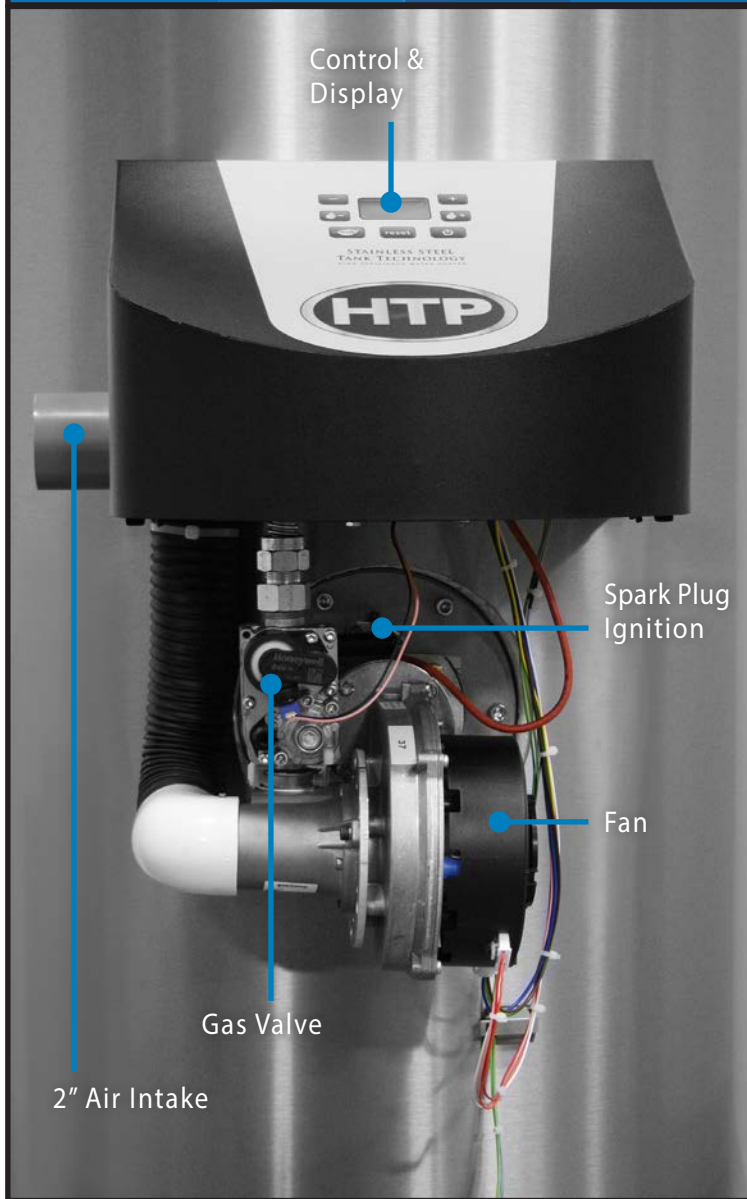

High Efficiency Stainless Steel Gas-Fired Water Heater

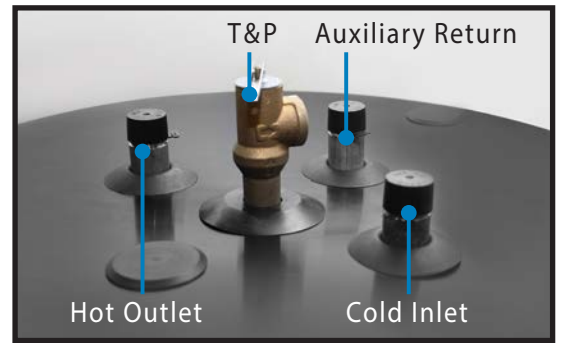

Heat Exchanger

Cupronickel spiral design that expands and contracts rapidly with the change in temperature resisting scale build-up.

-Durable Construction

-High Performance

-Excellent Heat Transfer Capabilities



NO Anode Rods Needed!

All coated tanks require anodes to delay the inevitable corrosion and tank failure. The Phoenix Light Duty stainless steel tank will outlast any coated steel tank in the market!



CONTROL & DISPLAY



Functions

1. Menu Navigation Down
2. Menu Navigation Up
3. Decreases the DHW Setpoint
4. Increases the DHW Setpoint
5. **ECO Mode:** PROVIDES REAL ENERGY SAVINGS, WHEN LESS HOT WATER IS NEEDED
6. Reset
7. Off/DHW Mode Enable

FEATURES

Modulating Combustion System

- 3:1 turndown ratio - 25,000 to 76,000 Btuh
- Ultra Low NOx compliant

Superior 316L Stainless Steel Tank Construction

- 3 tank sizes: 50, 60, & 80 nominal gallons
- Laser welded precision, lightweight tank
- No anode rods needed

Highly Efficient Combustion Heat Exchanger

- The Phoenix Light Duty uses the latest, patented technology and is covered by U.S. Patent No. 10,024,57, it's cupronickel heat exchanger design boasts excellent heat transfer properties and resists corrosion
- High grade stainless steel burner

Venting

- 2" PVC, CPVC or ULC S636 pipe
- Combined vent length of 150 feet
- Two pipe / single pipe, balanced or unbalanced venting system

The Phoenix LD performs better than tankless

- Avoid inconsistent water fluctuations
- No minimum flow rates needed to provide hot water
- Deliver hot water to multiple outlets and large volume showers faster

Advanced Electronic Control


- Easy to read LCD (icon and text) display

Highly Efficient Operation



- Up to 97% Thermal Efficiency
- Up to .90 Uniform Energy Factor

Ease of Installation

- Top ports on inlet and outlet
- Top connect auxiliary port for recirculation line or **AIR HANDLER** piping, increases overall efficiency

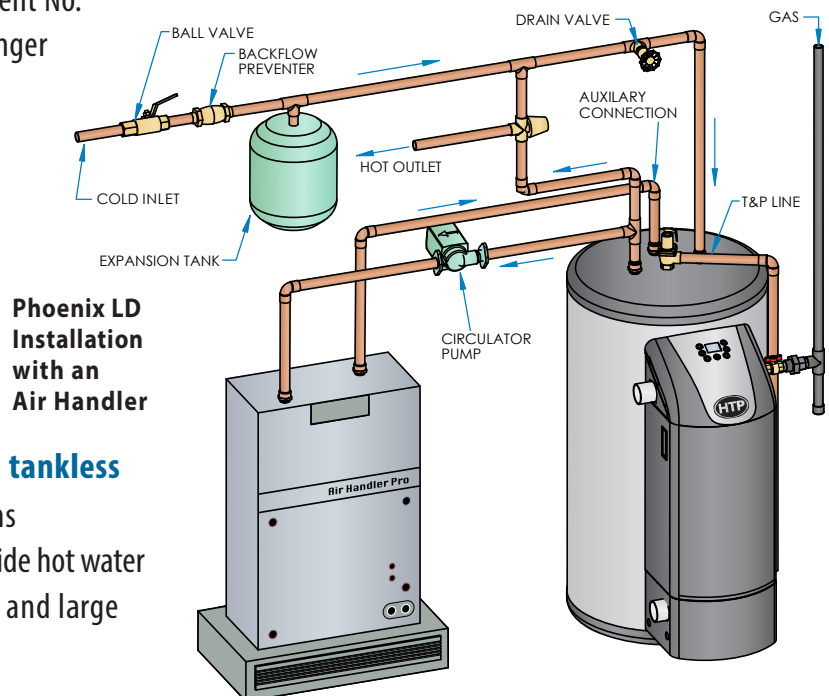

Phoenix LD Specifications

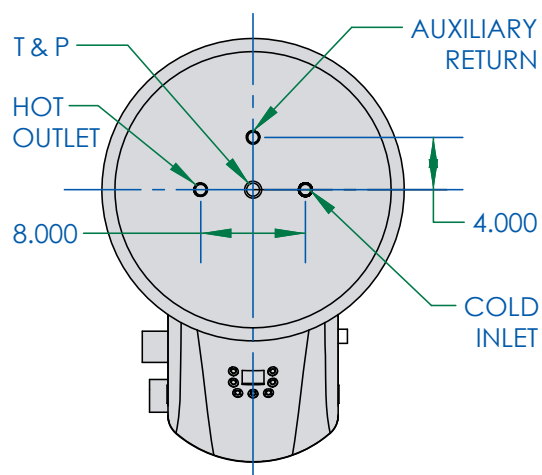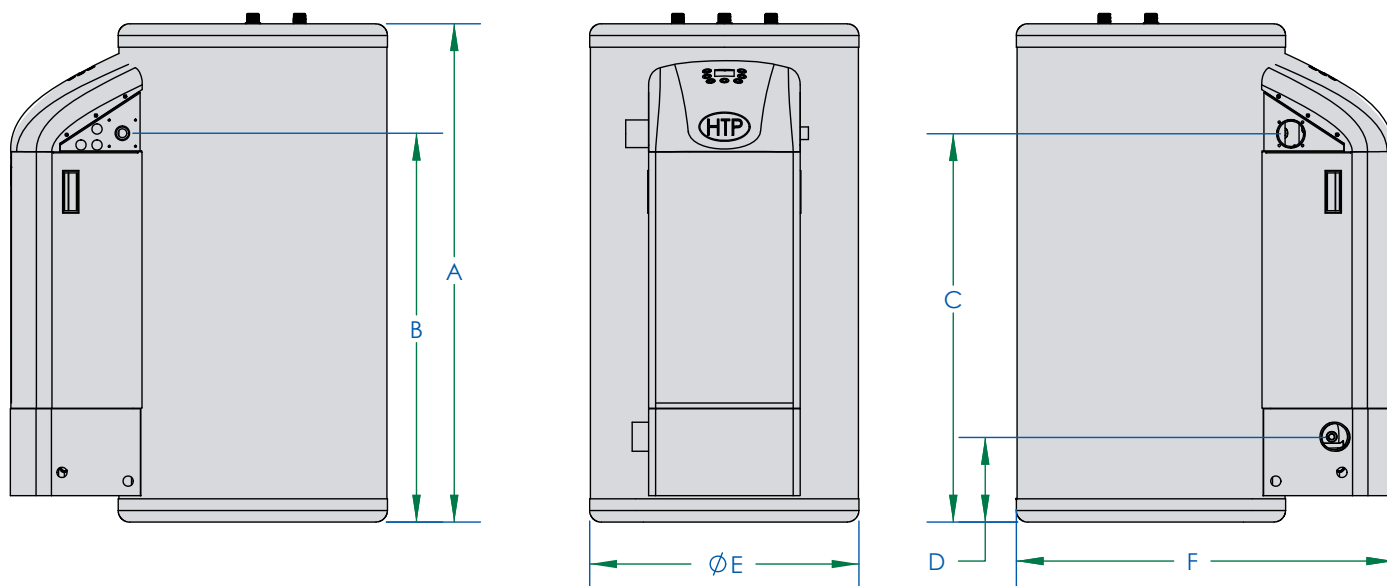

STANDARD FEATURES

- Up to 97% TE and up to .90 UEF
- Modulating Burners with Up to 3:1 Turndown Ratio
- Vents in PVC, CPVC, Stainless Steel, ULC S636
- Spark ignition with flame monitoring
- Flame stabilization monitoring
- Integrated Control System
- Pressure relief pre-piped
- Limited Warranty:

Residential: 10 year if registered online
& **7 year** if not registered

Commercial: 3 year (upgradeable to
5 year with additional charge)

WHAT'S IN THE BOX

- Intake PVC Tee w/ Screens
- Exhaust PVC Coupling w/ Screens
- Installation Manual
- Temperature & Pressure Relief Valve
- Warranty

OPTIONAL EQUIPMENT

- Outdoor Sensor
- 2" or 3" PVC Concentric Vent Kit
- 2" or 3" Stainless Steel Outside Termination Vent Kit
- 3" Polypro Vent Kit

MODEL	A	B	C	D	E	F	Nominal Storage Capacity	Vent Size	Gas Line	Inlet/Outlet Size	Relief Valve	Aux Conn.
PH76-50	44.75"	33"	33"	6.75"	23"	32.5"	50 GAL.	2"	1/2"	3/4" NPT	3/4" FNPT	3/4" NPT
PH76-60	52.625"	33"	33"	6.75"	23"	32.5"	60 GAL.					
PH76-80	69"	33"	33"	6.75"	23"	32.5"	80 GAL.					

MODEL	Btuh	DOE Rated Storage Volume	AHRI CERTIFIED® www.ahridirectory.org			First Hour Rating Bin	Ratings Not Certified by AHRI	Recovery GPH At 90° F Rise	Max. Temp Limit
			UEF	Recovery Efficiency	First Hour Rating		Thermal Efficiency		
PH76-50	25,000 - 76,000	48 GAL.	.90	96%	154 GAL.	High	97%	98	160°F
PH76-60	25,000 - 76,000	58 GAL.	.88	97%	157 GAL.	High	97%		
PH76-80	25,000 - 76,000	77 GAL.	.87	94%	206 GAL.	High	95%		
PH76-80S*	25,000 - 76,000	77 GAL.	N/A	94%	206 GAL.	High	95 %	107	

* Solar

www.htproducts.com • 272 Duchaine Blvd, New Bedford, MA • © Ariston Thermo USA LLC. 08/06/2020 • MKTLIT-53

In accordance with our company policy of ongoing product improvement, HTP reserves the right to make changes without prior notice. • Preliminary product specifications