


SELECT[®] DIRECT-VENT



Residential Gas Water Heaters 6-Year Tank Warranty • 6-Year Parts Warranty

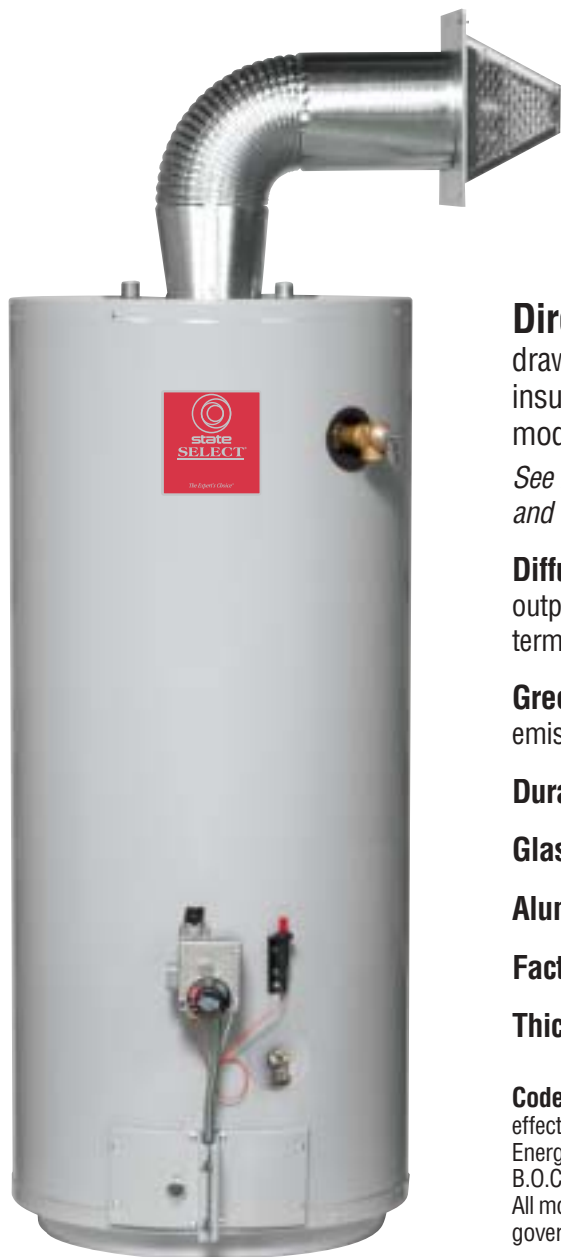

Direct-Vent Design – One-pipe, dual channel closed-combustion system draws all make-up air from outside the home, eliminating problems caused by insufficient indoor ventilation. Horizontal air intake and venting on most models up to four feet from outside wall, with no electrical power needed.

See reverse side for horizontal and vertical vent extensions provided by standard and optional vent kits.

Diffuser Dip Tube – Helps reduce lime and sediment buildup, maximizes hot water output. Made of State PEXAN[™], a cross-link PEX polymer that can withstand long-term exposure to water temperatures up to 400°F.

Green Choice[™] Eco-Friendly Gas Burner – Patented design reduces NOx emissions up to 33% and complies with Southern California and Texas requirements.

Durable Brass Tamper-Resistant Drain Valve.

Glasslined Tank – For long-lasting protection against rust and corrosion.

Aluminum Anode Rod – For additional protection against rust and corrosion.

Factory-Installed Temperature & Pressure (T&P) Relief Valve.

Thick, CFC-Free Foam Insulation.

Code Compliance – All models meet or exceed federal minimum energy standards effective January 20, 2004, according to latest editions of the National Appliance Energy Conservation Act (NAECA). They also comply with the latest editions of the B.O.C.A. National Codes, C.E.C., U.B.C., S.B.C.C., C.A.B.O. and the H.U.D. standards. All models design-certified by CSA International according to ANS Z21.10.1 standards governing storage-type water heaters.



For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Lindahl Parkway, Ashland City, TN 37015
www.statewaterheaters.com

 **state**
WATER HEATERS
The Expert's Choice[®]

SELECT[®] DIRECT-VENT



Residential Gas Water Heaters 6-Year Tank Warranty • 6-Year Parts Warranty

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GAL. CAP.	BTU INPUT PER HOUR NATURAL†	RECOVERY 90°F RISE GALLONS	R* VALUE	DIMENSIONS IN INCHES							APPROX. SHIPPING WEIGHT (LBS.)
							A	B	C	D	E	F	VENT OUTLET**	
PR6 40 XODS	68	.59	40	36,000	36	16	63-3/4	48-3/4	21	14-5/8	8	42	3 in 6	181
PR6 40 XBDS	71	.59	40	40,000	40	16	63-3/4	48-3/4	21	14-5/8	8	42	3 in 6	195
PR6 50 XODS	77	.58	50	38,000	38	16	72-1/2	57-1/2	21	14-5/8	8	50-3/4	3 in 6	209
PR6 50 XBDS	87	.58	50	48,000	49	16	76	61	21	14-5/8	8	54-1/4	3 in 6	241
PR6 75 XODS	109	.53	75	55,000	52	16	76-1/2	61-1/2	26-1/4	14-5/8	8	54-3/4	3 in 6	300

Recoveries are rounded to nearest gallon

Water Connections – 3/4" on all models

* R value shown is "performance rated"

**Dual-channel system has 3" vent pipe inside 6" air intake pipe

† Propane Input on PR6 50 CBDS: 44,000 (not available on PR6 75 XODS)



When ordering Propane, change "X" to "C" in model number (PR6 40 C~~O~~DS)

VENT EXTENSION KITS

Select Direct-Vent Water Heaters are shipped with Standard Vent Kit #9000687, which allows for horizontal vent extension (back of water heater to inside wall plus wall thickness) up to 10" on 40 and 50-gallon models, and up to 7-3/8" on the 75-gallon model. Standard Vent Kit #9000687 adds 00" to the total height of the installation (floor to top of vent pipe).

Optional Vent Extension Kits (#9001246, #9001247 and #9001248) can be ordered for use when longer horizontal vent extension or higher vertical vent extension are required, as shown in the chart below.

VENT KIT NO.	HORIZONTAL VENT EXTENSION <i>back of heater to inside wall, plus wall thickness when used with these water heaters</i>				VERTICAL VENT EXTENSION <i>from floor to top of vent pipe when used with these water heaters</i>							
	40 & 50-Gal.		75-Gal.		PR6 40 XBDS PR6 40 XODS		PR6 50 XBDS		PR 50 XODS		PR6 75 XODS	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Standard: 9000687	3-1/2	10	7/8	7-3/8	68-3/4	–	76	–	72-1/2	–	76-1/2	–
Optional: 9001246	10	15-1/2	7-3/8	12-7/8	72	77-1/2	84-1/4	89-3/4	80-3/4	86-1/4	86-1/4	91-1/4
9001247	15-1/2	26-1/2	12-7/8	23-7/8	77-1/2	88-1/2	89-3/4	100-3/4	86-1/4	97-1/4	91-1/4	102-1/4
9001248	26-1/2	48	23-7/8	45-3/8	88-1/2	110	100-3/4	122-1/4	97-1/4	118-3/4	102-1/4	124-1/4

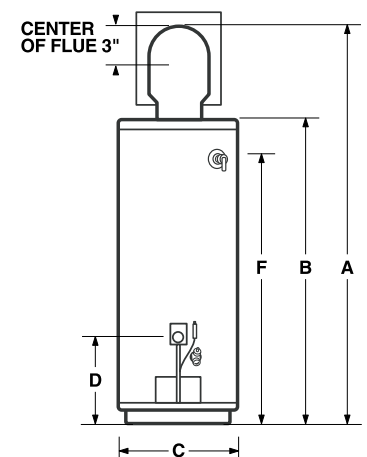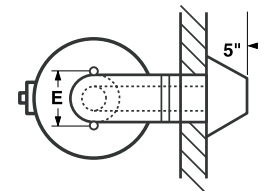

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Lindahl Parkway, Ashland City, TN 37015
www.statewaterheaters.com

